


NOTES:

1. SPECIALITY:

- 1.1 Rated current:1.0A
- 1.2 Rated voltage:30V
- 1.3 Contact Resistance:50mΩ MAX
- 1.4 Insulation Resistance:1000MΩ MIN 500V DC
- 1.5 Dielectric withstanding voltage: 500V AC.
- 1.6 Solder ability: 250±5℃, 5±0.5s.
- 1.7 Durability:1500 Cycles Min.
- 1.8 Operating condition: Temperature-40℃~+85℃; Humidity 80% R.H MAX

2. PLEASE CONTACT JITS SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY


ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN

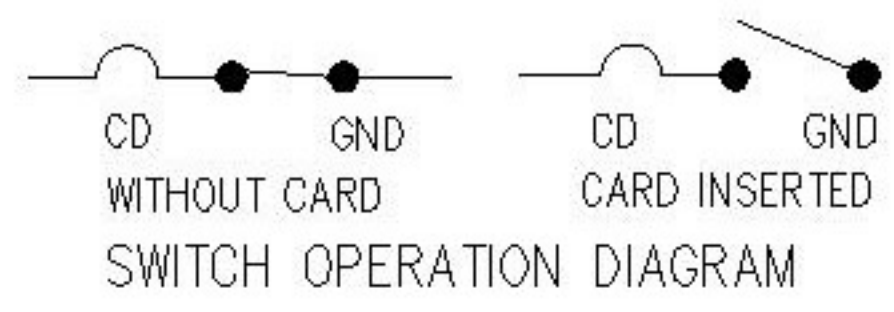

3FF SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

ITEM	PART NAME	Q'TY	MATERIAL	FINISHING
1	HOUSING	1	HI-TEMP.PLASIC	Black UL94V-0
2	TERMINAL	7	COPPER ALLOY	Contact area : Gold plated
3	CD SWITCH	1	COPPER ALLOY	Contact area : Gold plated
4	SHELL	1	SUS	SMT area : Gold plated
5	SPRING	1	SWP	
6	HEART CAM	1	HI-TEMP.PLASIC	Black UL94V-0
7	CAM PIN	1	SUS	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE: SIM CARD CONN		
ΔX					ANGLAR ±5°	DWN	DATE	VIEW:	PART NO.:		
ΔX					L ≤ 4 ±0.2	CHKD	DATE	UNIT: mm	DWG NO.: XKSIM-003-P7		
ΔX					4 < L ≤ 16 ±0.3	APPD	DATE	SIZE: A4			
					16 < L ≤ 63 ±0.4						
					L > 63 ±0.5						
						KKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT 1.0g	SHEET 1/1	REVISION A0

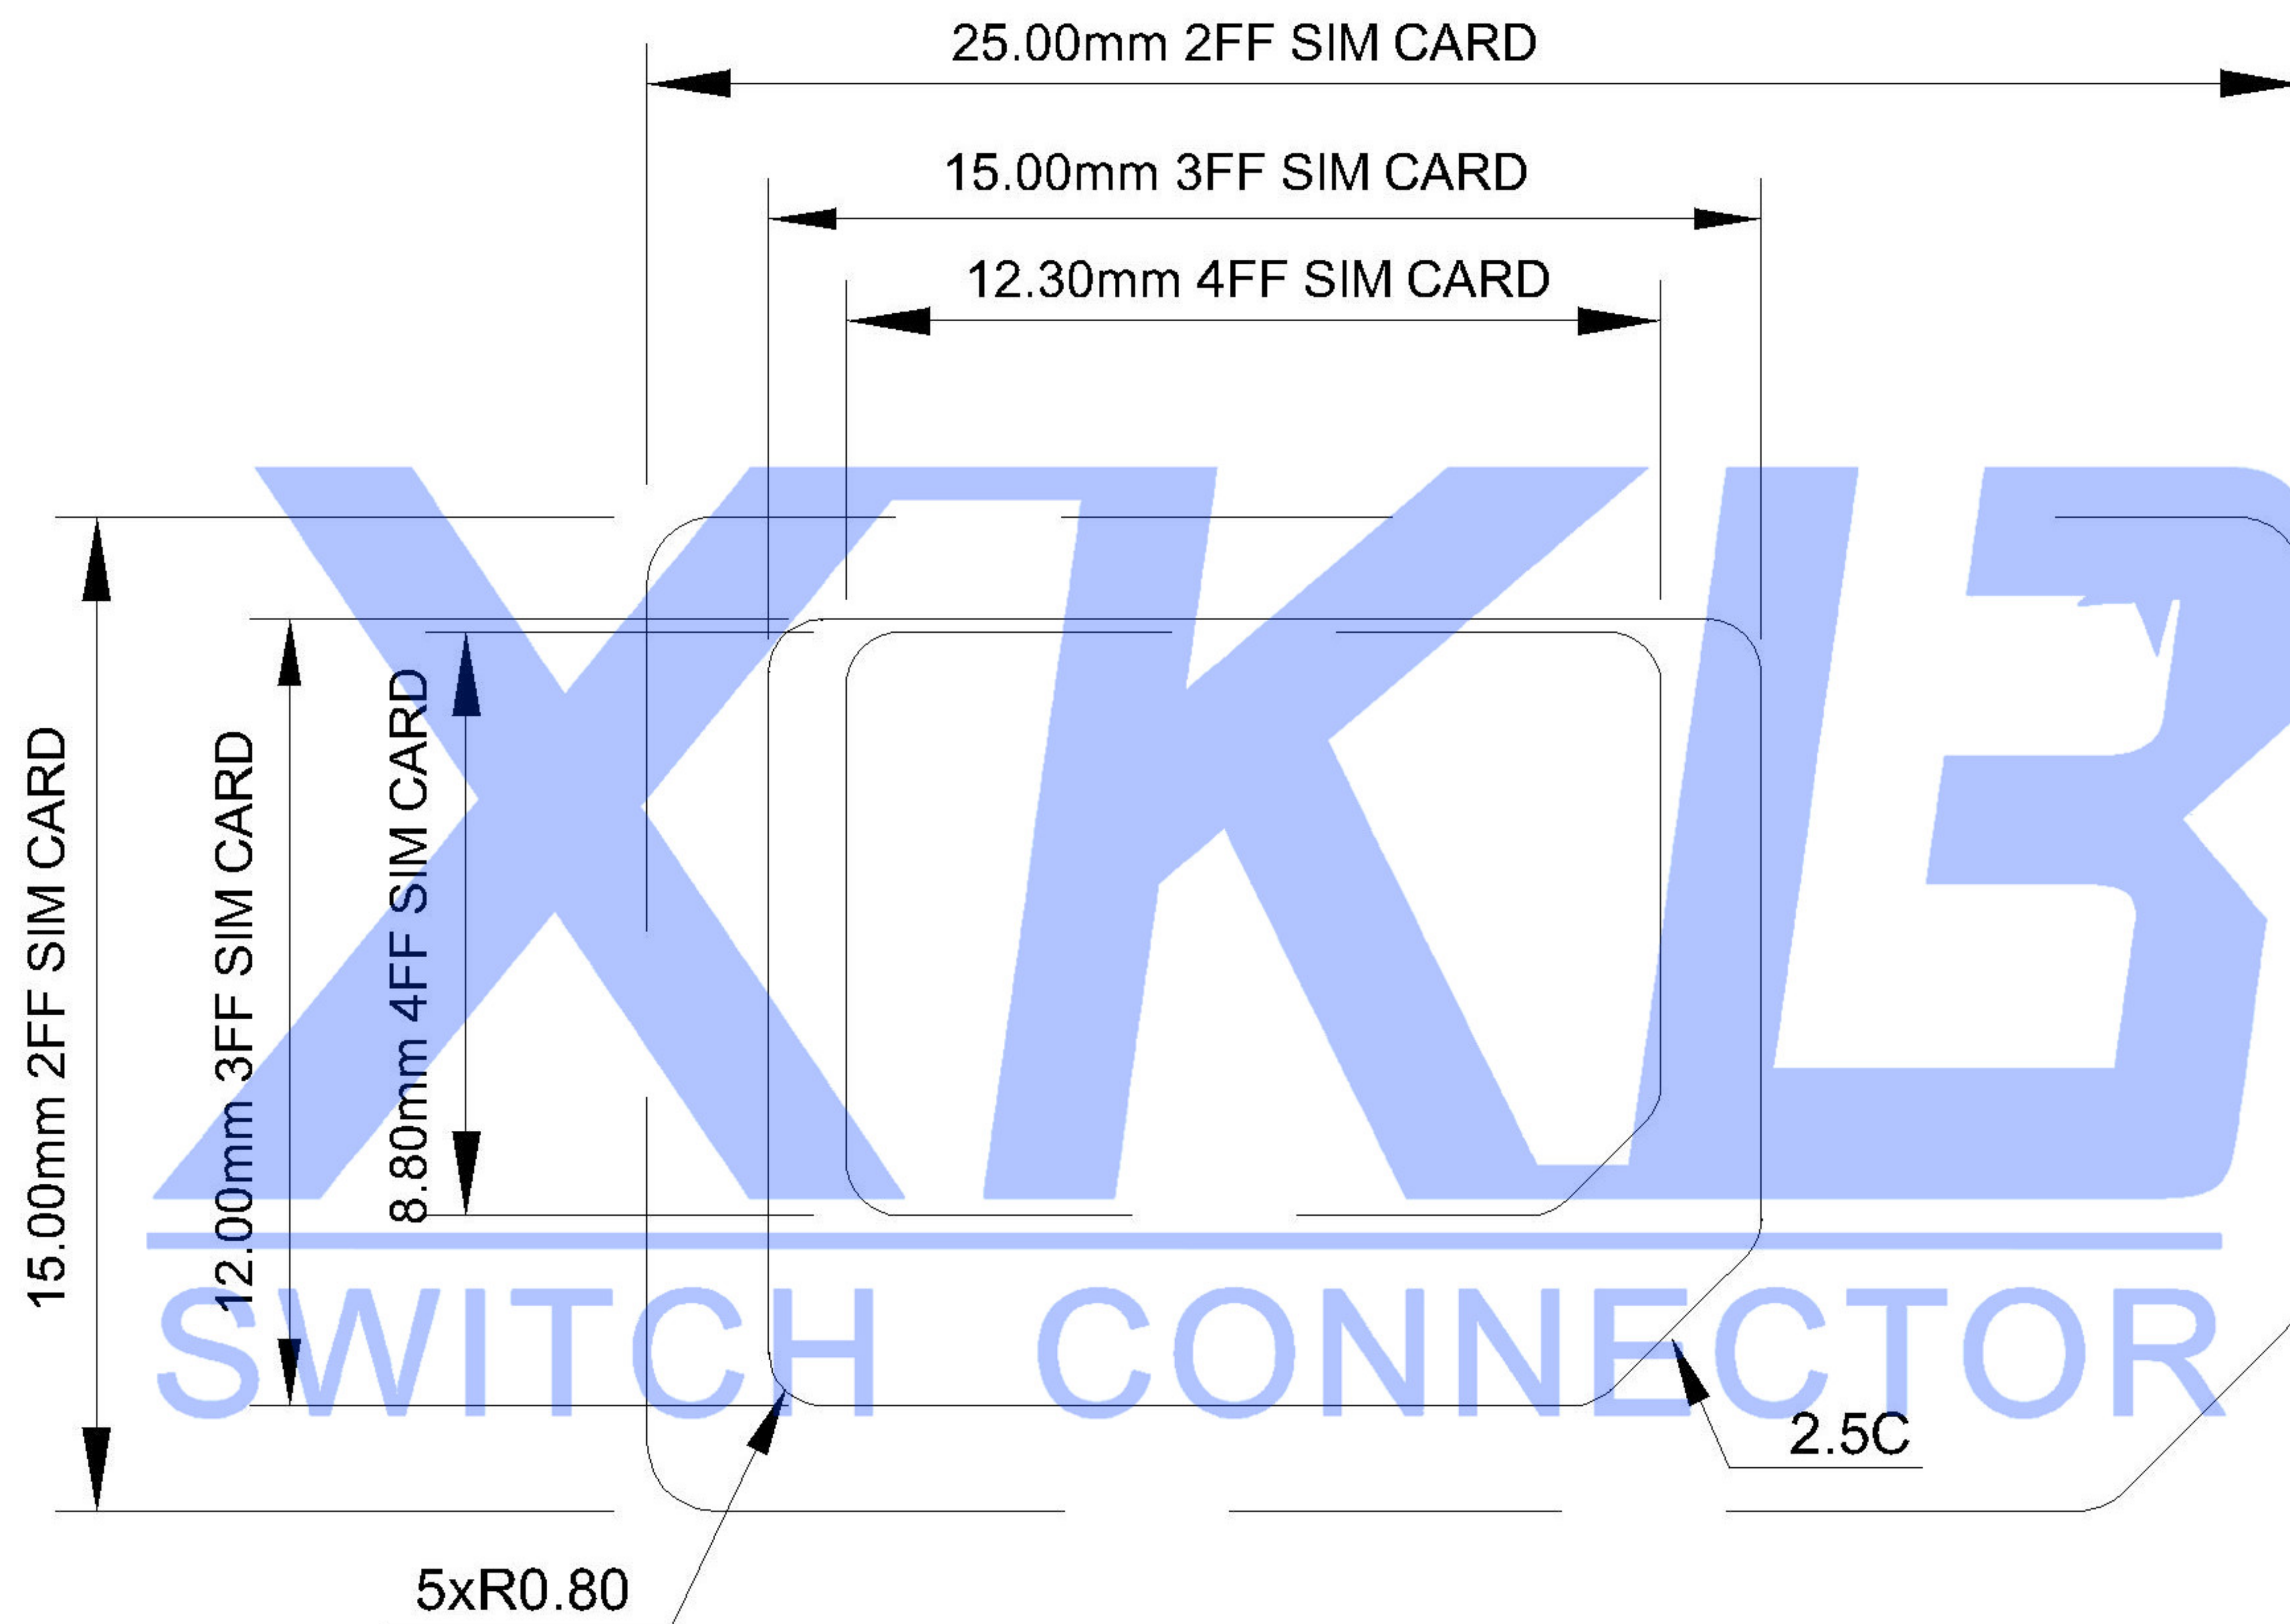

					ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE: SIM CARD CONN	
△X					L ≤ 4	±0.2	DWN		DATE		VIEW:	PART NO.:	
△X					4 < L ≤ 16	±0.3	CHKD		DATE		UNIT: mm	DWG NO.: XKSIM-003-P7	
△X					16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5					WEIGHT	SHEET	REVISION
					UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO., LIMITED				1.0g	1/1	A0
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn													