



- A.Material:
- 1.Insulator:High temperature thermoplastic UL94V-0,(BLACK LCP)
 - 2.Pho.Bronze:Plating,
50U" MIN NICKEL UNDERPLATED;
3-8U" GOLD ON THE CONTACT AREA;
100U" TIN PLATING ON SOLDER TAIL
- B.Electrical specifications:
- Voltage rating: 10 V AC
 - Current rating: 0.5A
 - Dielectric strength: 500V AC for 1 minute min
 - Insulation resistance: 1000 M ohm
 - Contact resistance: 100 mill.ohm max
 - Operation temperature: -25° to +95°
 - Product withstanding rff low soldering 260° for 10s
- C.Mechanical specieications:
- 3.1 Durability: 5000 cycles

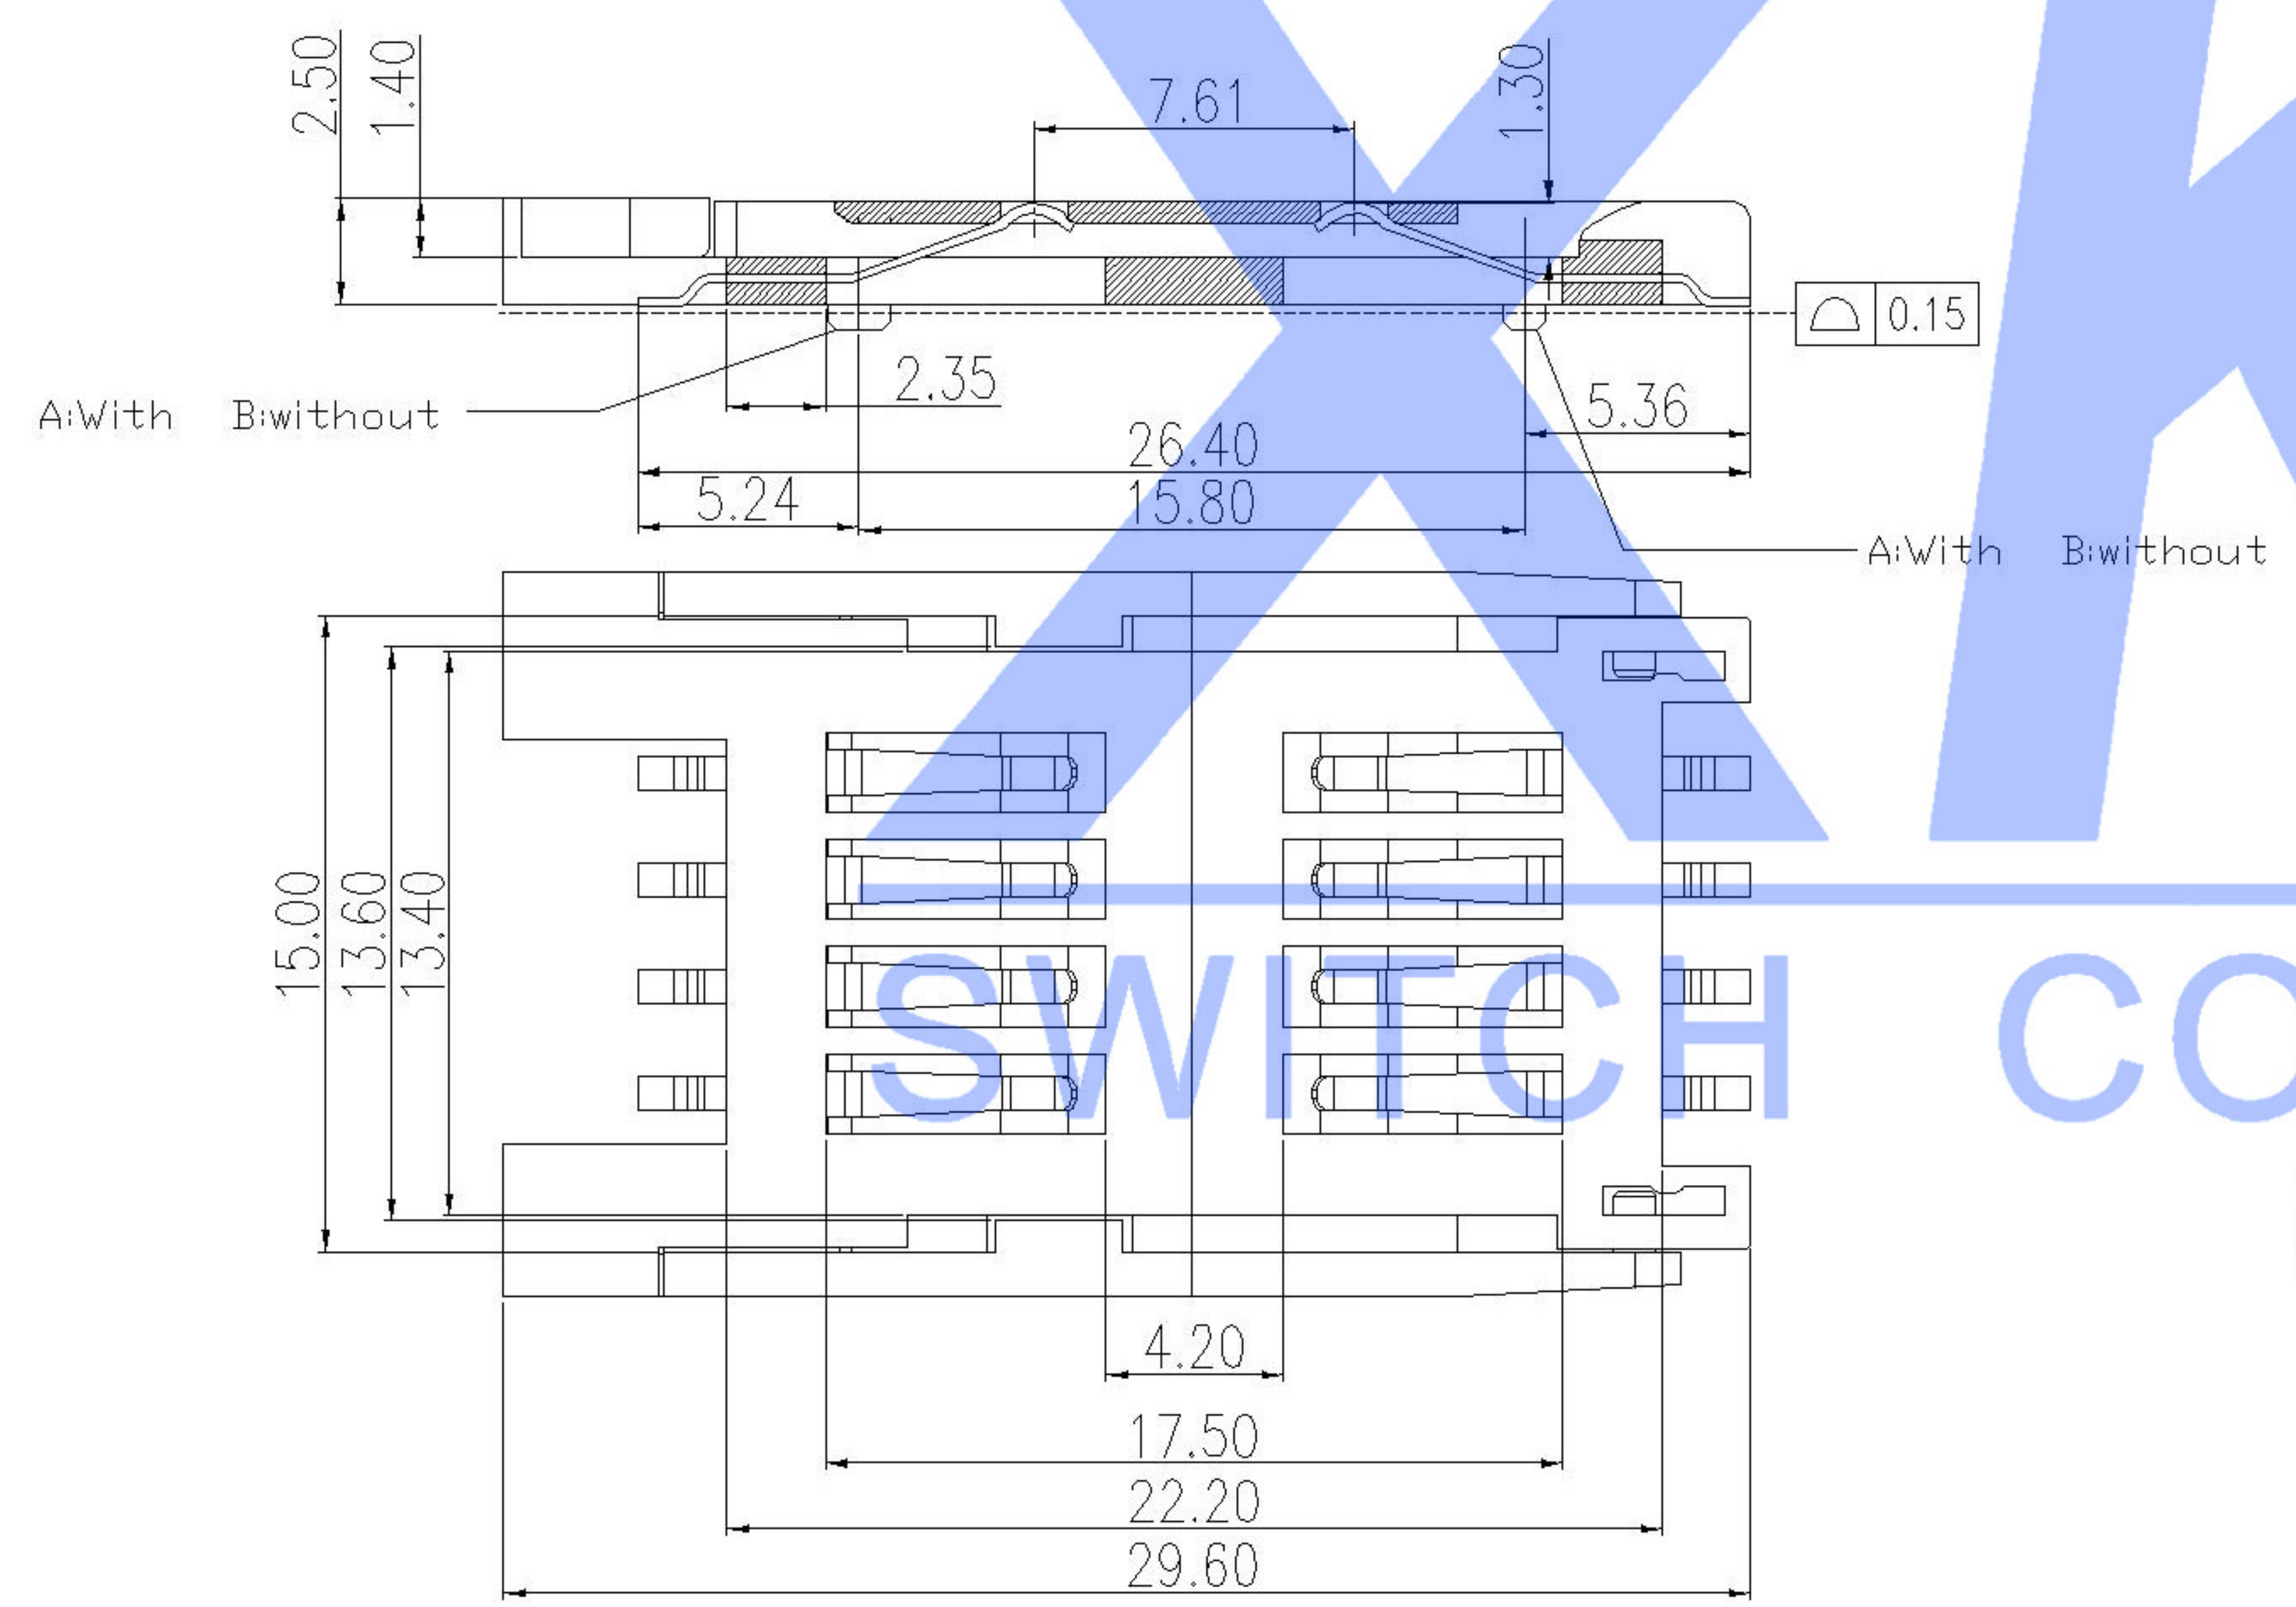


XKSIM-011B-P8-X

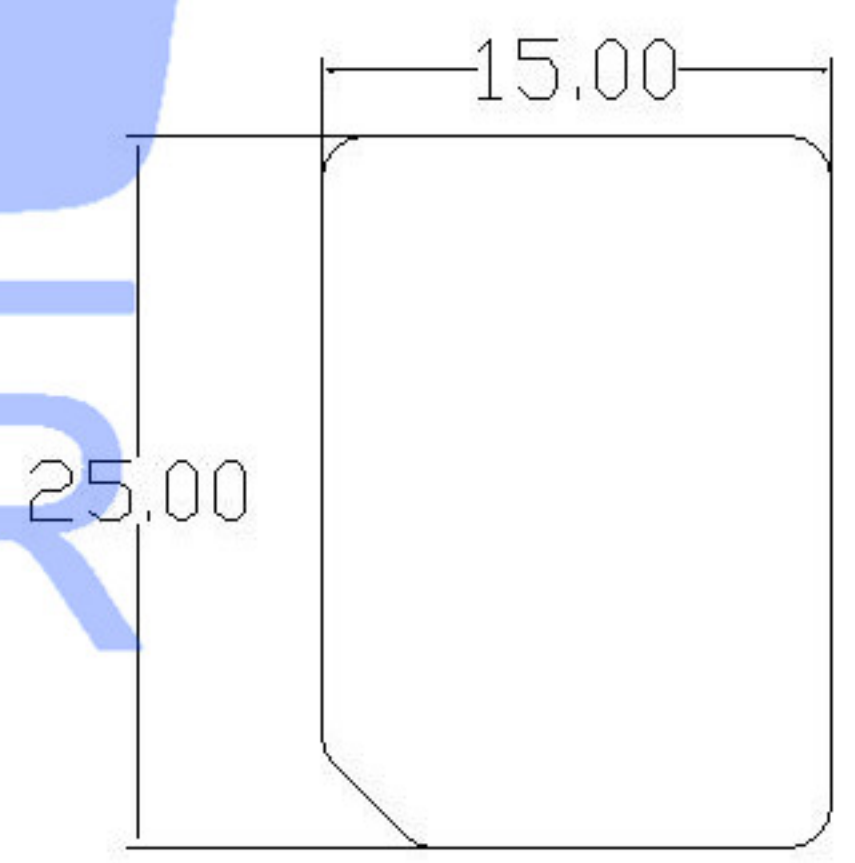

RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

②	Terminal	6	COPPER ALLOY	
①	Housing	1	LCP UL 94V-0	BLACK
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

					ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE: SIM CARD CONN	
△X					L ≤ 4	±0.2	DWN		DATE		VIEW:	PART NO.:	
△X					4 < L ≤ 16	±0.3	CHKD		DATE		UNIT: mm	DWG NO.:	
△X					16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4	XKSIM-011B-P8-X	
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5					WEIGHT	SHEET	REVISION
REVISIONS					UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				1.0g	1/1	A0
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn													

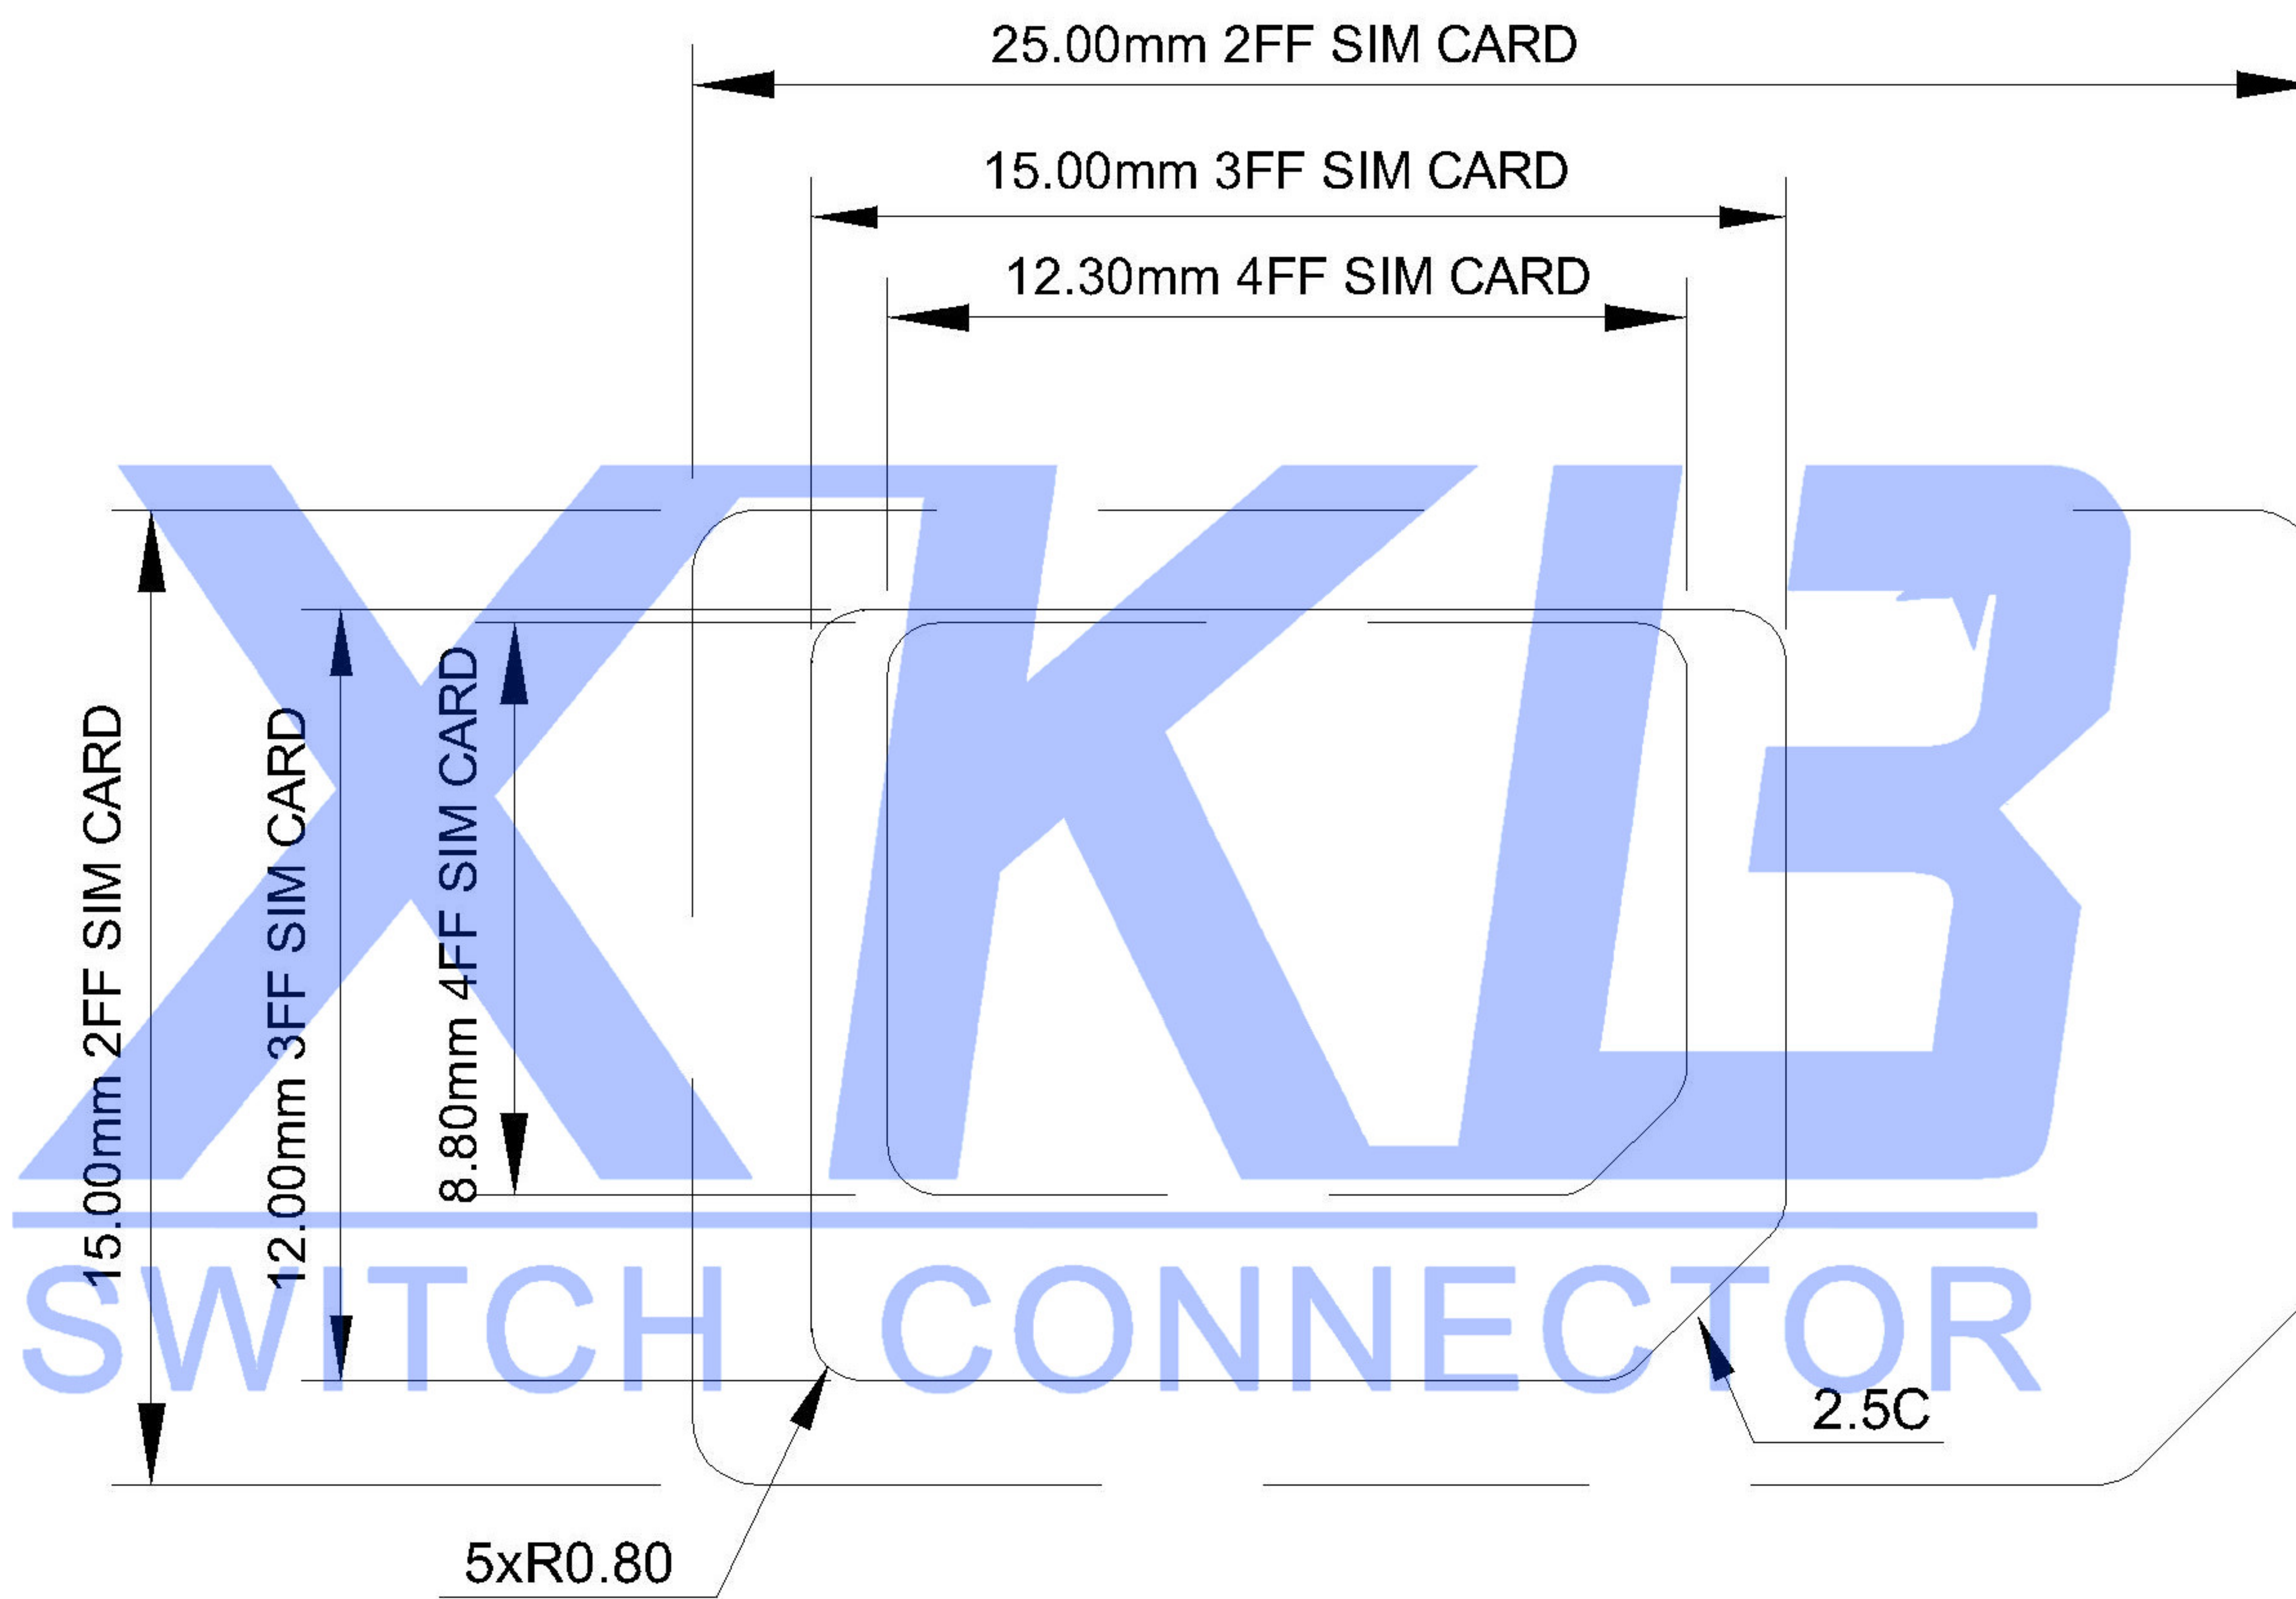

								DSND		DATE		SCALE: N/A	MODEL TYPE: SIM CARD CONN	
Δx								DWN		DATE		VIEW:	PART NO.:	
Δx								CHKD		DATE		UNIT: mm	DWG NO.:	
Δx								APPD		DATE		SIZE: A4	XKSIM-011B-P8-X	
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES			XKKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT	SHEET	REVISION
												1.0g	1/1	A0