


PIN NO.	PIN NAME
PIN 1	Supply Voltage Vcc
PIN 2	Resrt(RST)
PIN 3	Clock (CLK)
PIN 5	Ground
PIN 6	Programming Voltage Vpp
PIN 7	I/O
PIN 4/8	N/A

Recommended PCB Layout

ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING
③	Shell	1	SUS	
②	Terminal	6	COPPER ALLOY	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE: SIM CARD CONN
ΔX					ANGLAR ±5°	DWN	DATE	VIEW:	PART NO.:
ΔX					L ≤ 4 ±0.2	CHKD	DATE	UNIT: mm	DWG NO.:
ΔX					4 < L ≤ 16 ±0.3	APPD	DATE	SIZE: A4	XKSIM-004
					16 < L ≤ 63 ±0.4				WEIGHT 1.0g
					L > 63 ±0.5				SHEET 1/1
									REVISION A0

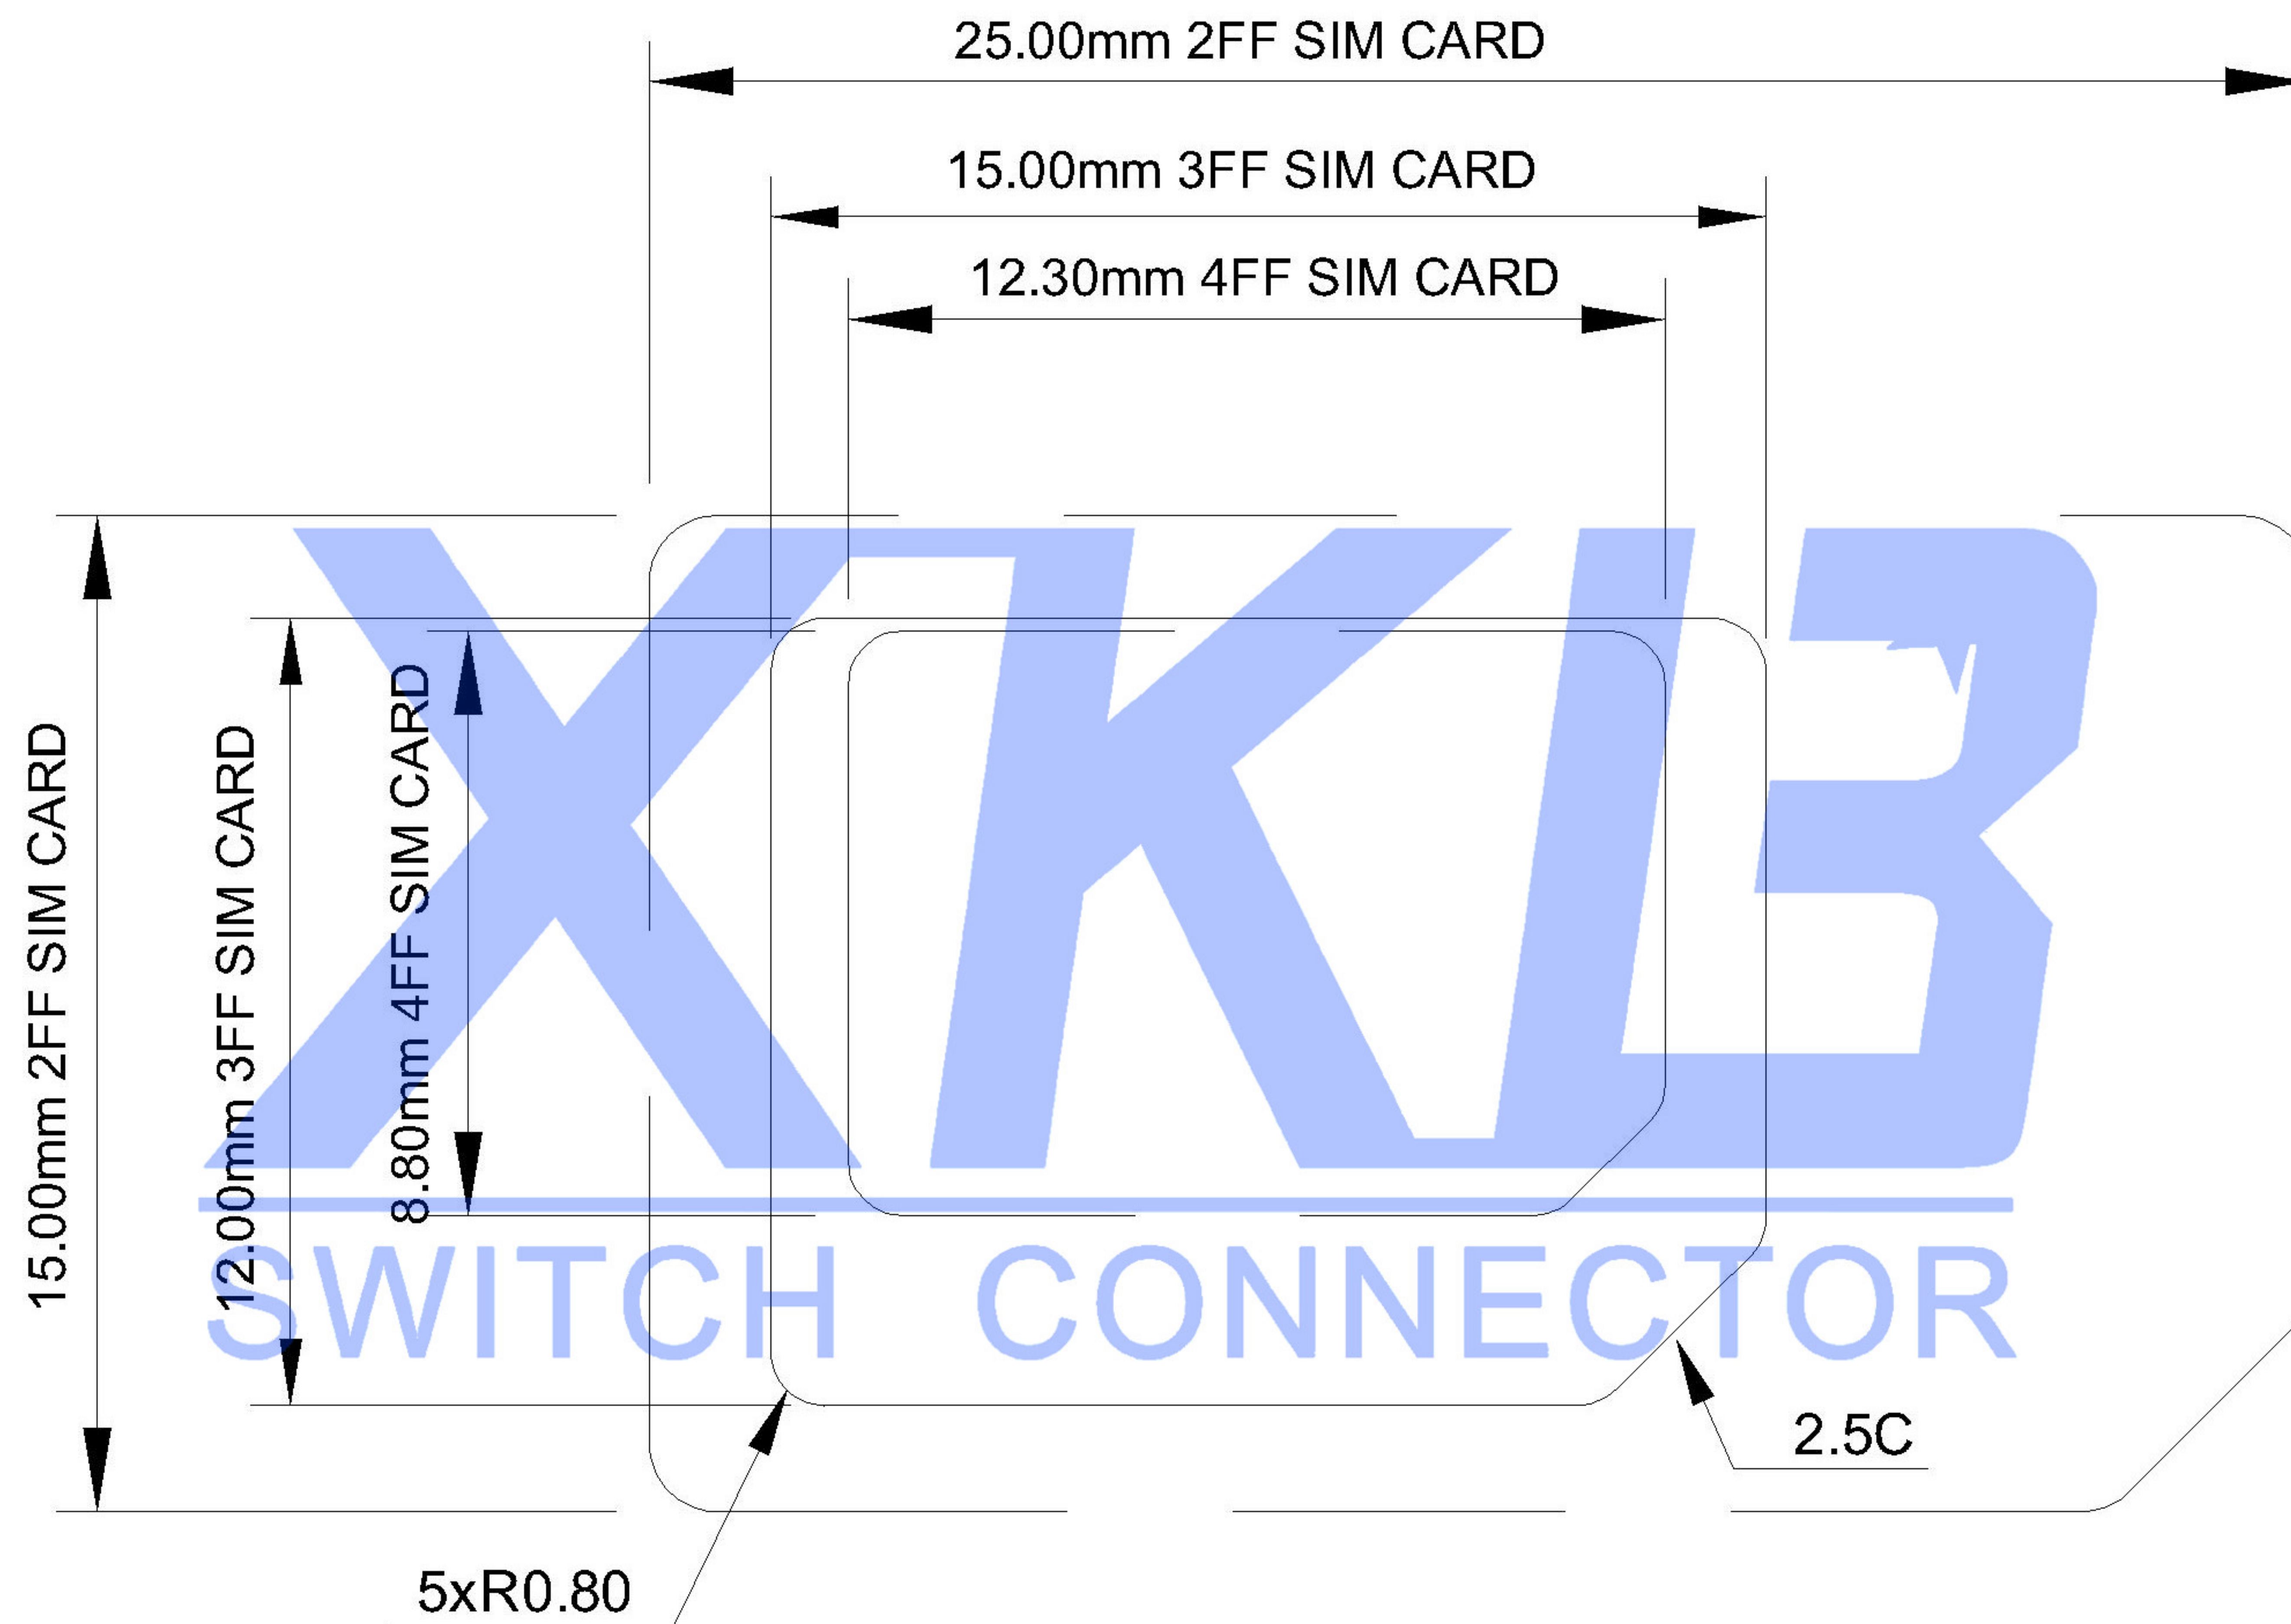

						ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE: SIM CARD CONN
△X						L ≤ 4	±0.2	DWN		DATE		VIEW:	PART NO.:
△X						4 < L ≤ 16	±0.3	CHKD		DATE		UNIT: mm	
△X						16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4	DWG NO.: XKSIM-004
MARK	DESCRIPTION	DATE	REVISED	APPROVED		L > 63	±0.5	XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT	SHEET	REVISION
REVISIONS							UNSPECIFIED TOLERANCES				1.0g	1/1	A0
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn													